

# SOLSTICE<sup>®</sup> 454C (R-454C)

## Technical Data Sheet

Solstice<sup>®</sup> 454C (R-454C) is a non-ozone depleting, zeotropic blend designed as a low Global Warming Potential (GWP) alternative to R-404A in refrigeration applications.

Solstice<sup>®</sup> 454C demonstrates nearly 10% improved efficiency and capacity within 8% of R-404A, with a GWP that's 96% lower than R-404A.

With its environmental qualities and an evaporator glide of less than 8°F, R-454C can be an effective long term refrigeration solution in many applications:

- Low and medium temperature supermarket refrigeration
- Low and medium temperature convenience store and restaurant refrigeration
- Cold storage
- Plug in refrigeration equipment



### GENERAL PROPERTIES

Class/Type	Zeotropic Blend
Formula	"R-32 / R-1234yf (21.5% / 78.5%)"
Appearance	Colorless
ODP	0
GWP (IPCC AR4)	146
ASHRAE Standard 34 Class	A2L

### UNITS

Molecular weight	90.776 lbm/lb-mol
Boiling Temperature	-50.0°F
Critical Temperature	180.2°F
Critical Pressure	626.4 psia
Critical Volume	0.035 ft <sup>3</sup> /lbm
Critical Density	28.82 lbm/ft <sup>3</sup>
Vapor Density at 0 psig (Boiling Point)	0.214 lbm/ft <sup>3</sup>
Liquid Density at 32°F	70.94 lbm/ft <sup>3</sup>
Liquid Density at 77°F	65.08 lbm/ft <sup>3</sup>
Vapor Density at 77°F	2.78 lbm/ft <sup>3</sup>
Liquid Heat Capacity at 77°F	0.368 Btu/lbm-R
Vapor Heat Capacity at 77°F	0.271 Btu/lbm-R
Vapor Pressure at 77°F	141.68 psia
Liquid Thermal Conductivity at 77°F	0.044 Btu/h-ft-R
Vapour Thermal Conductivity at 77°F	0.008 Btu/h-ft-R
Liquid Viscosity at 77°F	0.000087 lbm/ft-sec
Vapour Viscosity at 77°F	0.000008 lbm/ft-sec

### HIGHLIGHTS

- Maximum UL 60335-2-89 charge of 165lbs
- 96% lower GWP than R-404A
- Close match to R-404A equipment design
- ~10% higher COP than R-404A
- Temperature glide similar to R-448A
- Miscibility with POE lubricants

**Honeywell**

## SAFETY AND STORAGE

Honeywell recommends reading the Safety Data Sheet (SDS) before using the product. Solstice® 454C is a mildly-flammable refrigerant (ASHRAE class A2L).

## MATERIAL COMPATIBILITY

Honeywell does not recommend the use of chlorinated solvents to clean refrigeration systems or components.

## Desiccants

Desiccant driers compatible with Solstice® 454C are commercially available. Contact individual drier manufacturers for specific recommendations.

## Lubricants

POE (polyolester) oil is recommended for Solstice® 454C. Compressor manufacturers typically qualify specific lubricants for use with their products. Check with the equipment manufacturer for the recommended lubricants for their system.


## Plastics and elastomers

Solstice® 454C is compatible with most common materials. Since there are many different grades and formulations of these materials, we recommend that compatibility testing be performed on the specific grade of materials under consideration and at the conditions of use when designing new systems. Customers should consult the manufacturer or conduct further independent testing.

## LEAK DETECTION

Leak detectors can be used for pinpointing specific leaks or for monitoring an entire room on a continual basis. Leak detection is important for refrigerant conservation, equipment protection and performance, reduction of emissions and protection of those coming in contact with the system. Customers should consult the equipment manufacturer for appropriate detectors.

## PRESSURE AND ENTHALPY

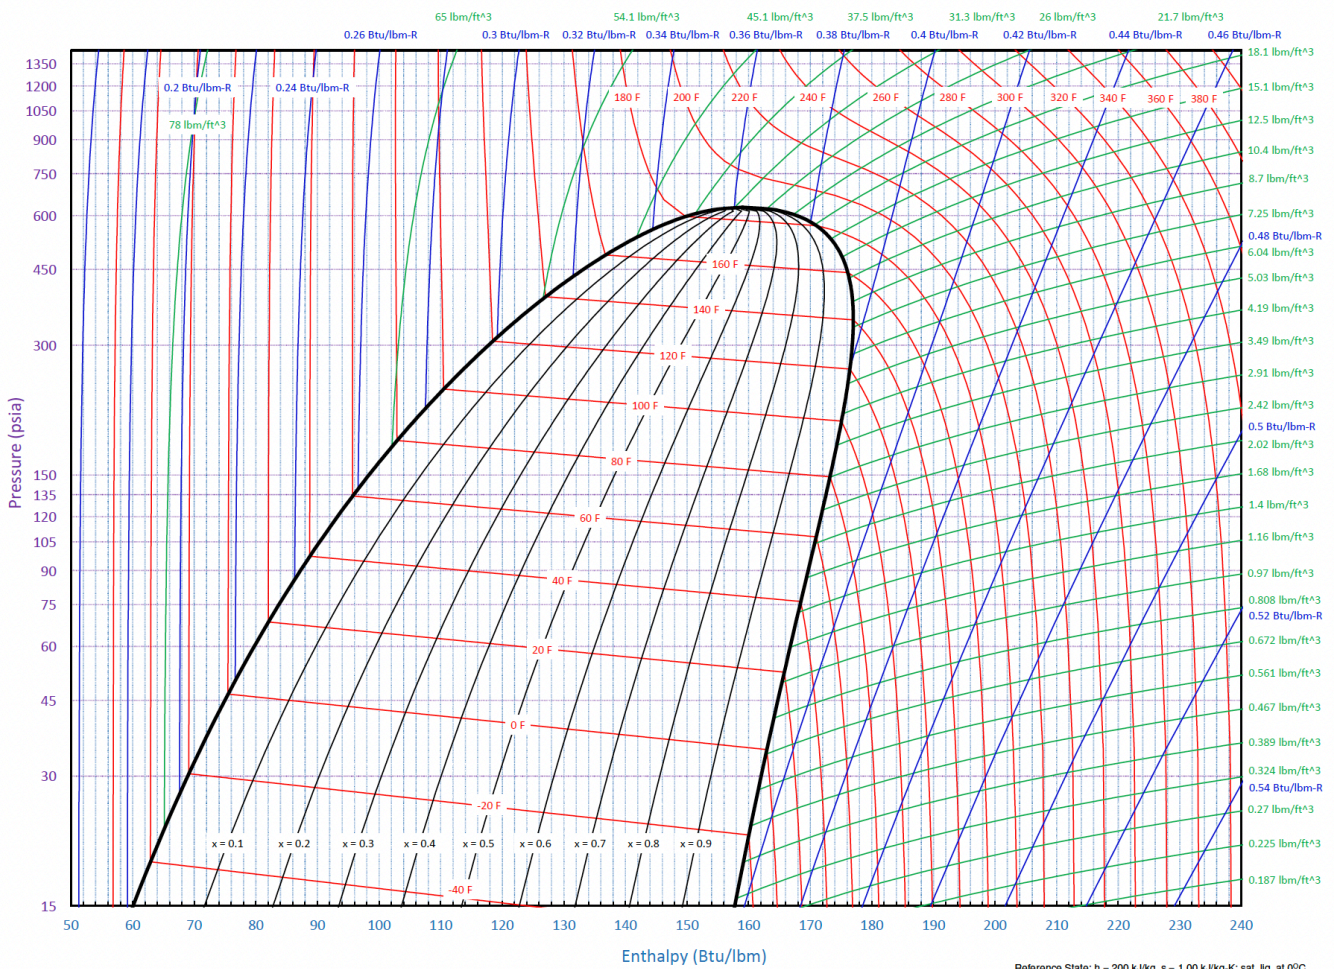

R-454C		
PRESSURE (PSIG)	VAPOR TEMPERATURE (F)	BUBBLE TEMPERATURE (F)
0	-50.0	-36.0
5	-38.5	-24.4
10	-29.1	-14.9
15	-21.0	-6.9
20	-14.0	0.2
22	-11.4	2.8
24	-8.9	5.3
26	-6.5	7.7
28	-4.2	10.0
30	-1.9	12.2
32	0.2	14.4
34	2.3	16.4
36	4.4	18.5
38	6.3	20.4
40	8.2	22.3
42	10.1	24.2
44	11.9	26.0
46	13.7	27.7
48	15.4	29.4
50	17.1	31.1
55	21.1	35.1
60	24.9	38.9
70	32.0	45.9
80	38.5	52.3
90	44.5	58.3
100	50.1	63.8
105	52.8	66.4
110	55.4	68.9
115	57.9	71.4
120	60.3	73.8
125	62.7	76.1
130	65.0	78.4
135	67.3	80.6
140	69.5	82.7

R-454C		
PRESSURE (PSIG)	VAPOR TEMPERATURE (F)	BUBBLE TEMPERATURE (F)
145	71.6	84.8
150	73.7	86.8
155	75.8	88.8
160	77.8	90.8
165	79.8	92.7
170	81.7	94.6
175	83.6	96.4
180	85.5	98.2
185	87.3	99.9
190	89.1	101.7
195	90.8	103.4
200	92.6	105.0
205	94.3	106.7
210	95.9	108.3
215	97.6	109.8
220	99.2	111.4
230	102.4	114.4
240	105.4	117.3
250	108.4	120.2
260	111.3	122.9
270	114.1	125.6
280	116.9	128.2
290	119.6	130.8
300	122.2	133.2
310	124.8	135.6
320	127.3	138.0
330	129.8	140.3
340	132.2	142.5
350	134.5	144.7
360	136.8	146.8
370	139.1	148.9
380	141.3	150.9
390	143.5	152.9
400	145.7	154.9



**Disclaimer**

Although Honeywell International Inc. believes that the information contained herein is accurate and reliable, it is presented without guarantee or responsibility of any kind and does not constitute any representation or warranty of Honeywell International Inc., either expressed or implied. A number of factors may affect the performance of any products used in conjunction with user's materials, such as other raw materials, application, formulation, environmental factors and manufacturing conditions among others, all of which must be taken into account by the user in producing or using the products. The user should not assume that all necessary data for the proper evaluation of these products are contained herein. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liabilities (including, but not limited to, risks relating to results, patent infringement, regulatory compliance and health, safety and environment) related to the use of the products and/or information contained herein.

**For More Information visit**

[advancedmaterials.honeywell.com](https://advancedmaterials.honeywell.com)

**Honeywell Advanced Materials**

115 Tabor Road  
Morris Plains, NJ 07950  
800-631-8138

TCS-23-19-EN | 08/23  
© 2023 Honeywell International Inc.

**THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT**

**Honeywell**